


## LE922A6 Series

LTE 300/50 | 2C-HSPA+ | 42/11 Embedded

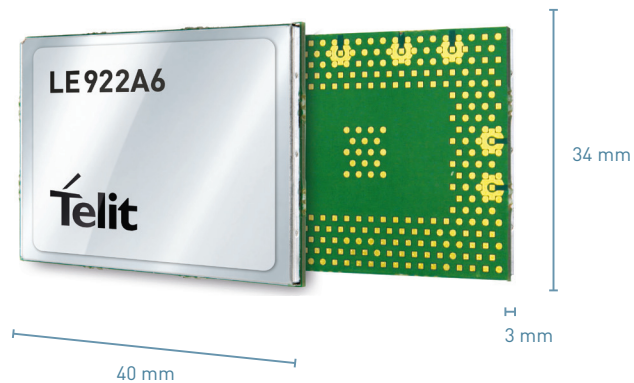

### Product Description

The LE922A6 product series delivers high speed data rates for deployment in the fastest LTE cellular 4G networks up to 300 Mbps downlink and 50Mbps in uplink.

These modules are well-suited for devices that demand extremely high data throughput requirements, such as mobile broadband gateways and routers, leveraging the benefit of the most advanced 3GPP Release 10 LTE connectivity in one of the following configurations:

- Back up connectivity when primary wire line internet connections are not available, ensuring seamless connectivity to the end users
- Hybrid connectivity combining DSL and LTE data streams to enhance data rate
- Mobile hotspot connectivity

The LE922A6 products are optimized for LTE Cat 6 high throughput, supporting MIMO and LTE Advanced carrier aggregation capabilities.

In addition, for voice applications, specific models support integrated enhanced VoLTE based services and IMS solutions with SRVCC over 3G for seamless voice continuity during mobility.

### Key Benefits

- Take advantage of the latest generation of LTE-A networks delivering LTE Cat 6 throughput up to 300 Mbps in DL and 50 Mbps in UL
- Increased connectivity performance with carrier aggregation up to 40MHz bandwidth, both intraband and interband, and MIMO 2x2
- Multiple regional variants to support the various bands (FDD/TDD) and band combinations deployed worldwide, all with the same form factor

- LGA form factor ideal for industrial segments where requirements for improved robustness and extended temperature range are more demanding, without compromising efficiency
- Cortex-A7 application processor with high computing capability already embedded in the SoC to reduce dependencies from an external host processor for end-products, such as mobile hotspots, that do not require additional Ethernet or analogic interfaces

### Variants

Two different models are available to fulfill the requirements of the Australian and European market and additional regional variants will follow.


Multi-band configurations, covering different sets of 4G bands and 3G bands where fall back to 3G technologies is required.

All product variants add the value of specific MNO certifications as well as regulatory certifications and GCF or PTCRB.

#### AVAILABLE FOR

EMEA  
 North America  
 Latin America  
 APAC  
 Korea  
 Australia

#### Complete, Ready to Use Access to the Internet of Things



	LE922A6-A1	LE922A6-E1
<b>Market</b>	Australia	Europe
<b>4G bands (MHz)</b>	700 (B28) / 1800 (B3) / 2100 (B1) / 2600 (B7) / 2300 (B40)	800 (B20) / 1800 (B3) / 2600 (B7)
<b>3G bands (MHz)</b>	900 / 2100	•
<b>Carrier aggregation</b>	DL 2CA 1+7, 1+28, 3+3, 3+28, 3+40, 7+7, 28+7, 40+40	DL 2CA 3+20, 3+7, 7+20, 3+3, 7+7
<b>Technology</b>	Rel. 10 LTE FDD & TDD, Cat 6 2C-HSPA+	Rel.10 LTE FDD, Cat 6
<b>Data throughput</b>	LTE FDD: DL: 300 Mbps, UL: 50 Mbps DC-HSPA+: DL: 42 Mbps, UL: 11 Mbps	LTE FDD: DL: 300 Mbps, UL: 50 Mbps
<b>RX Diversity</b>	YES	YES
<b>MIMO</b>	2x2 DL SU-MIMO 4x2 MIMO	2x2 DL SU-MIMO 4x2 MIMO
<b>VoTLE</b>	YES	YES
<b>Operating temperature</b>	-40°C to +85°C	-40°C to +85°C
<b>Supply Voltage</b>	3.6 V to 4.2 V (Typ. 3.8 V)	3.6 V to 4.2 V (Typ. 3.8 V)
<b>GPIO</b>	10	10
<b>USB</b>	3.0	3.0
<b>UART</b>	YES	YES
<b>SPI</b>	YES	YES
<b>I2C</b>	YES	YES
<b>SDIO</b>	YES	YES
<b>Dimensions</b>	34 x 40 x 3mm	34 x 40 x 3mm
<b>Certifications</b>	RCM, GCF Carrier Approval	R&TTE, GCF Carrier Approval



## Join the Telit Technical Forum

For a quicker and more rewarding integration experience join the Telit Technical Forum. There you can browse the first open forum covering all IoT topics, get direct support by region (EMEA, North America, Latin America, APAC), take part in this quickly growing IoT community and exchange experiences.